
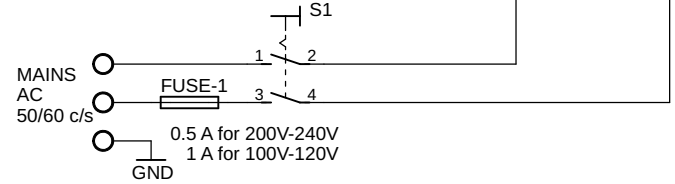


\* We recommend that R13 be either 700Ω 3W or 650Ω 3W + 150Ω 1/2W (see the post "EL84 bias issue on Mullard 3-3"). The cathode voltage of V2 will be 29-35V and the screen grid voltage of V1 will be 28-34V.

\*\* For another model of output transformer.

Speaker (Ω)	R4 (Ω)
4	150
8	100
16	82

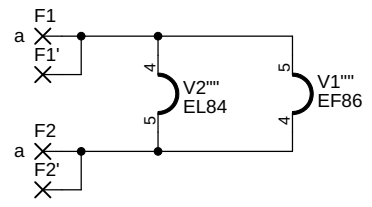

<h2>3W Stereo Quality Tube Amplifier</h2>		
TITLE: 1955 (Mullard 3-3) Tube Amp PCB 1B Multi-volt Wiring		
Author: Ricardo Pastor Asensi Heated Cathode (heatedcathode.com)		REV: <b>A</b>
Date: 01-MAR-2021	No.: 195502PCB02	Sheet: 1/1