


* We recommend that R13 be either 700Ω 3W or 560Ω 3W + 150Ω 1/2W (see the post "EL84 bias issue on Mullard 3-3"). The cathode voltage of V2 will be 29-35V and the screen grid voltage of V1 will be 28-34V.

** For another model of output transformer.

| TR2 Sec (Ω) | R4 (Ω) |
|-------------|--------|
| 4 | 150 |
| 8 | 100 |
| 16 | 82 |

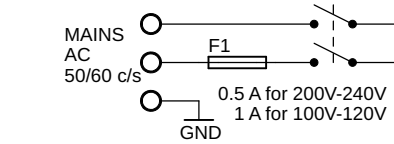

| | | |
|---|----------------|---------------|
| <h2>3W Stereo Quality Tube Amplifier</h2> | | |
| TITLE: 1955 (Mullard 3-3) Tube Amp w/ Tone Controls | | |
| Author: Ricardo Pastor Asensi Heated Cathode (heatedcathode.com) | | REV: A |
| Date: 07-MAY-2023 | Number: 1955-3 | Sheet: 1/1 |